

4G CampPro 2+

Easily share 4G data plan



Friendly Easy Setup



Solution for Boat & RV & Mobile House




Vehicle Power Surge Protection



Share 4G data to multi devices with WiF connection

Application Scenario

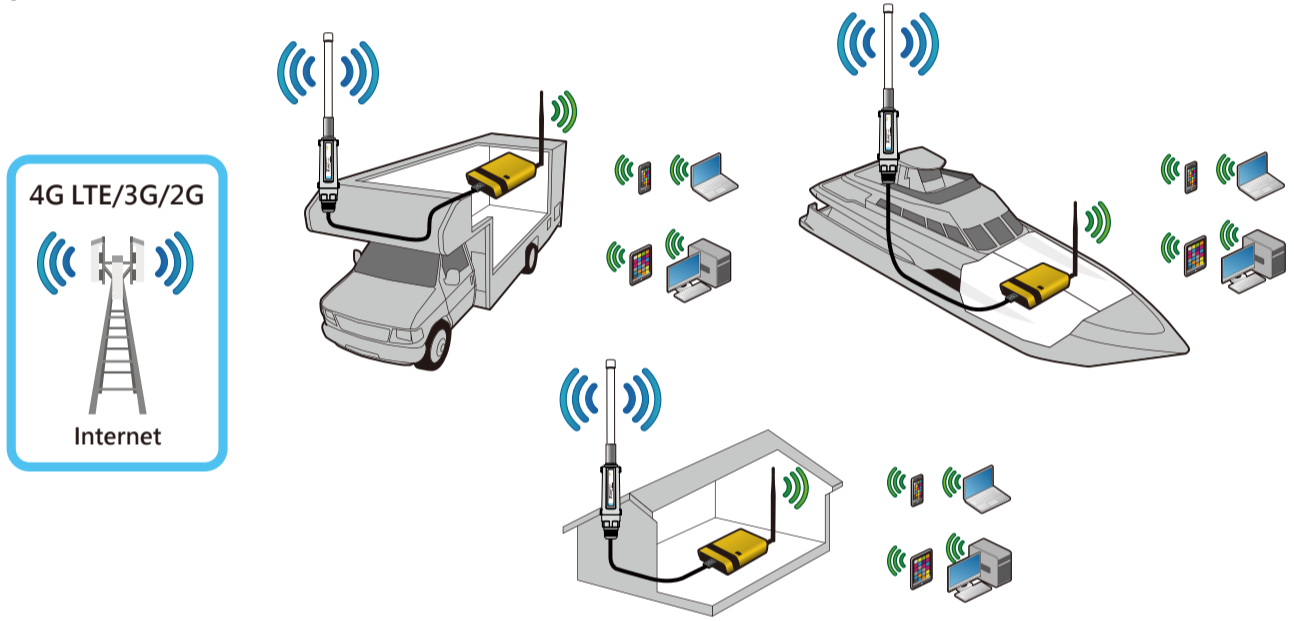

R36AH Specifications

Wi-Fi Standard	IEEE 802.11n IEEE 802.11g IEEE 802.11b	Wireless LAN Security Key	64/128bit WEP WPA-PSK WPA-EAP (PEAP/TTLS) WPA2-PSK WPA2-EAP WPA Mixed 802.1x authentication
Frequency	2.142GHz – 2.472GHz	Operation Temperature	-20°C ~ 40°C
Channel Width	20/40MHz	Storage Humidity	10% ~ 90% (Non -condensing)
Data Rate	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 300Mbps	Dimension (mm)	93x70x26 mm
Antenna	1x internal 1x external	Weight	74g
LED Indicators	Power, LAN, WAN, WLAN, USB		
Power requirement	12V DC		

Tube-U4Gv2 Specifications

Data	LTE FDD: Max 150Mbps (DL) / Max 50Mbps (UL) LTE TDD: Max 130Mbps (DL) / Max 35Mbps (UL) DC-HSDPA: Max 42Mbps (DL) HSUPA: Max 5.76Mbps (UL) WCDMA: Max 384Kbps(DL)/Max 384Mbps(UL) EDGE: Max 296Kbps(DL)/Max 236.8Kbps(UL) GPRS: Max 107Kbps(DL)/Max 85.6Kbps(UL)
Antenna connector	N female
Interface	Mini-USB 2.0 Standard 6 PIN SIM card
LED Indicators	Power/Connection
Power required	5V±5%

Antenna Specifications

Outdoor Antenna	Model: AOA-4G-5AM Frequency: 791-960MHz 1710-2170MHz 2300-2700MHz Impedance: 50Ω V.S.W.R: 3.0:1 Radiation: Omni Connector N male Material: Fiber Glass
Indoor Antenna	Model: ARS-N05 Frequency: 2.4GHz -2.5GHz Impedance: 50Ω S.W.R: ≤ 2.0 Gain: 5dBi Radiation: Omni Connector: RP-SMA male Material: Rubber Length: 171.5mm

Order Information

Model	4G CampPro 2+ -EU	4G CampPro 2+ -A	4G CampPro 2+ -V	4G CampPro 2+ -AU
Band	LTE FDD: B1/B3/B5/B7/B8/B20 LTE TDD: B38/B40/B41 WCDMA: B1/B5/B8 GSM: B3/B8	LTE FDD: B2/B4/B12 WCDMA: B2/B4/B5	LTE FDD: B4/B13	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28 LTE TDD: B40 WCDMA: B1/B2/B5/B8 GSM: B2/B3/B5/B8
Supported Country	EMEA/ Korea/ Thailand	AT&T/ T-Mobile/ Spire	Verizon	Australia/ New Zealand/ Taiwan/ Brazil